


Accepted as Shown
 Revise and Resubmit
 Accepted as Modified
 Date: _____
 Per: _____

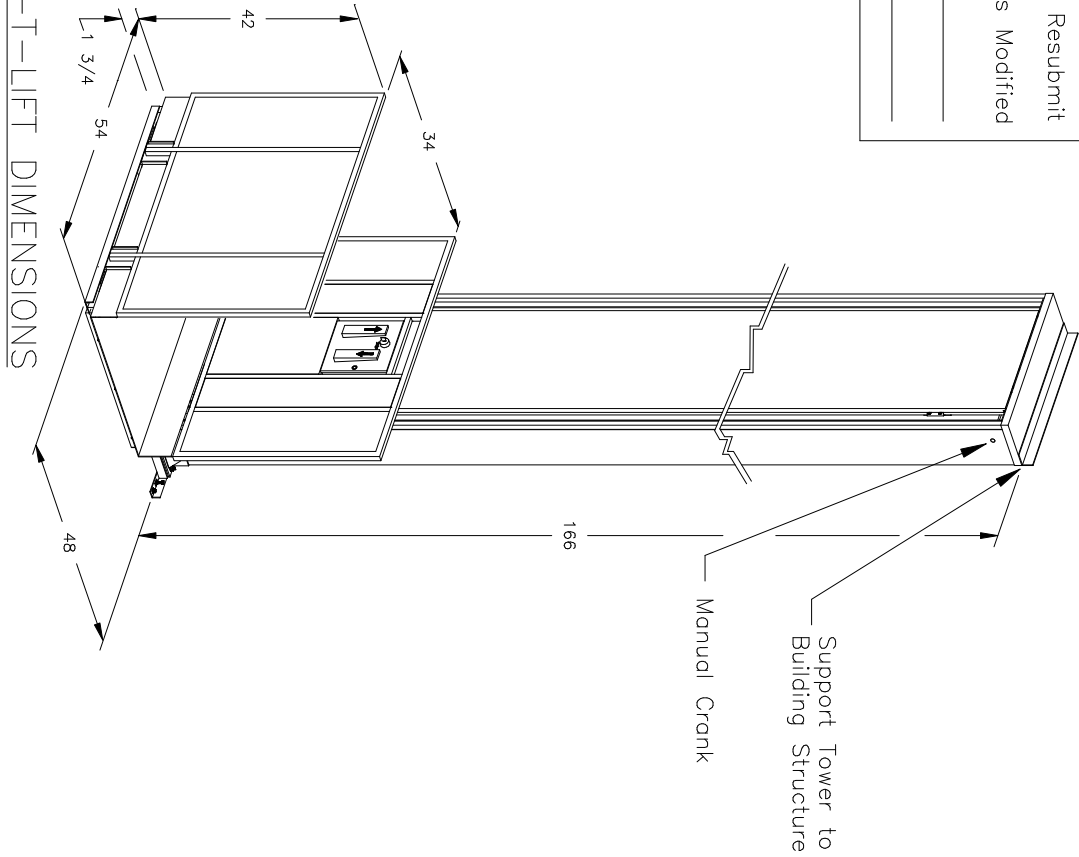


TRUS-T-LIFT DIMENSIONS



- SPECIFICATIONS:**
- 34" x 54" LIFT PLATFORM
 - 48" x 54" FOOTPRINT
 - 166" HEIGHT
 - 0" - 144" LIFT RANGE
 - MAXIMUM LOAD 550 lbs.
 - 8 FEET/MINUTE LIFT SPEED
 - SCREW NUT WORM GEAR DRIVE
 - MOTOR: 1/2 H.P. 110V A.C.
 - POWER SUPPLY: 110V/1PH/60HZ C/W 15A FUSED DISCON.
 - NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
 - SAFETY HANDRAIL ON CARRIAGE
 - ZERO-LOAD START IN BOTTOM POSITION

NOTES:

- Dimensions are in inches
- Designed and built to meet ANSI-A17.1 Safety Code

| | | | | |
|--------------------|---|--------|-----------------|---|
| TOTAL TRAVEL | 144 | INCHES | No. OF LANDINGS | 2 |
| LOCATION | ENCLOSED TRUS<T>LIFT S A M P L E D R A W I N G | | | |
| ARCHITECT | n/a | | | |
| GENERAL CONTRACTOR | n/a | | | |

| | | |
|-------------------------|---|--|
| DWN. BY: R.A.MEUNIER |  | TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS |
| CHECKED BY: | | |
| SCALE: N.T.S. | DATE: 26/02/02 | DRAWING No. 144UCREDGNP |
| | | 1/2 |

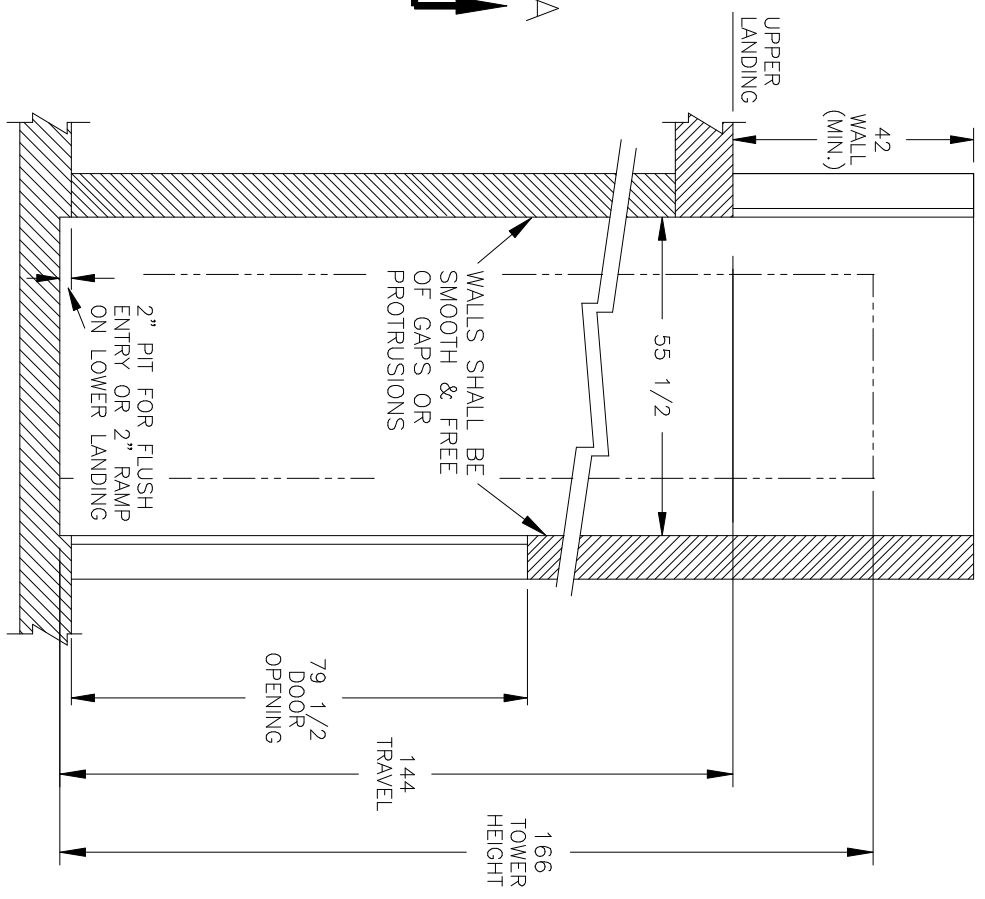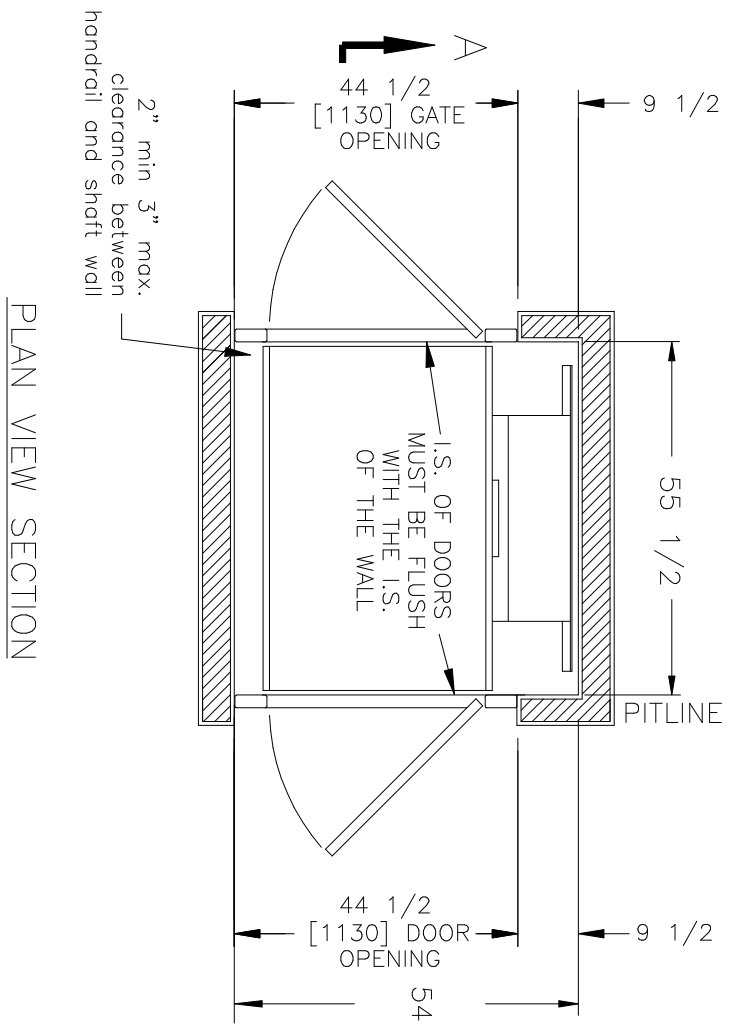

SECTION A-A

| | | | | |
|--------------------|---|--------|-----------------|---|
| TOTAL TRAVEL | 144 | INCHES | No. OF LANDINGS | 2 |
| LOCATION | ENCLOSED TRUS-T>LIFT S A M P L E D R A W I N G | | | |
| ARCHITECT | | | | |
| GENERAL CONTRACTOR | n/a n/a n/a | | | |

| | | |
|-------------------------|----------------|--|
| DWN. BY: R.A.MEUNIER | | TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS |
| CHECKED BY: | | |
| SCALE: N.T.S. | DATE: 26/02/02 | DRAWING No. 144UCREDDGNP |
| | | 2/2 |