



Accepted as Shown
 Revise and Resubmit
 Accepted as Modified
 Date: _____
 Per: _____

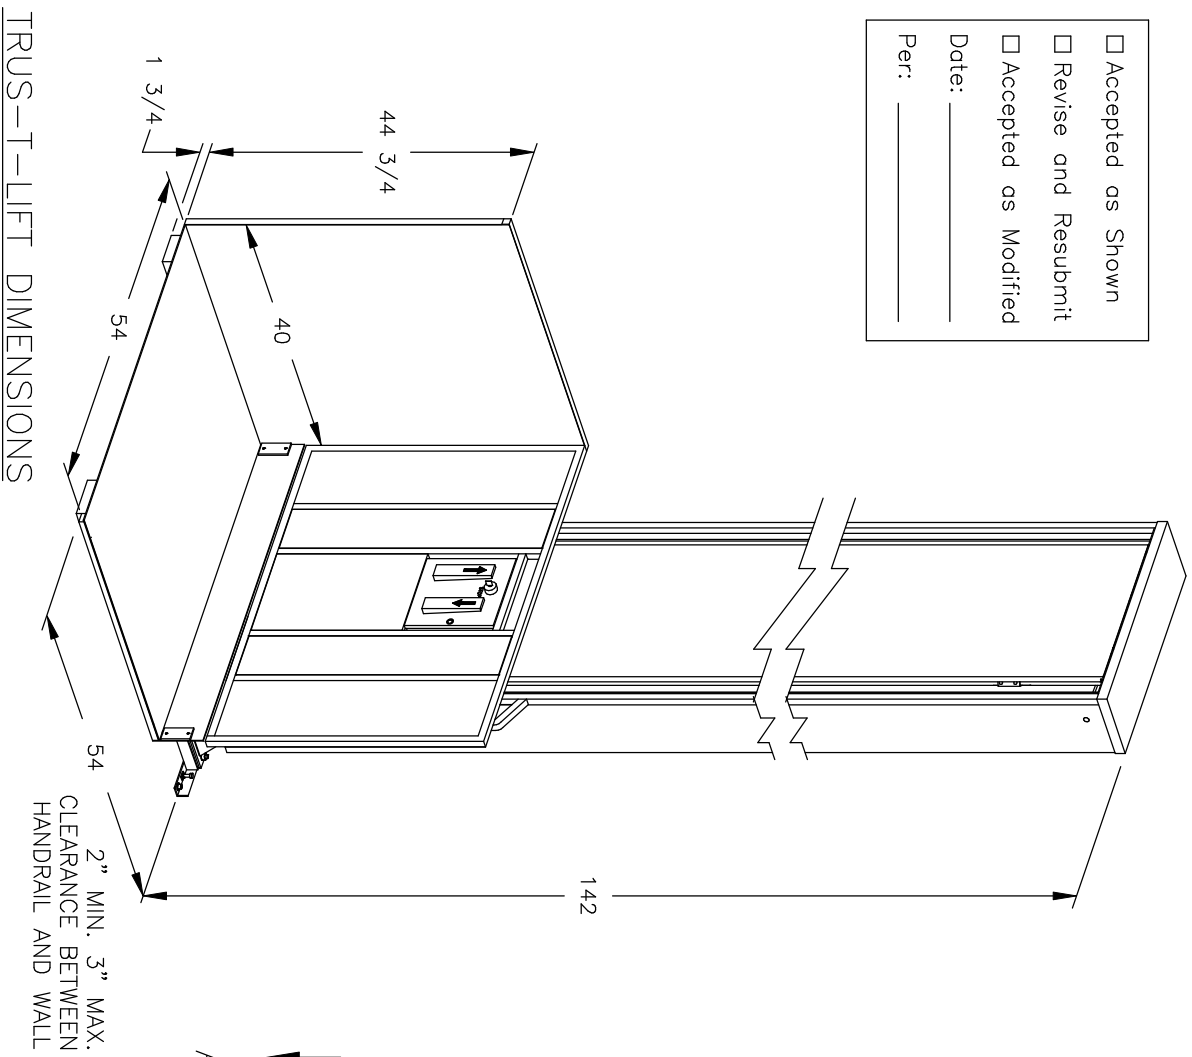

- SPECIFICATIONS:**
- 40" x 54" LIFT PLATFORM
 - 54" x 54" FOOTPRINT
 - 142" TOWER HEIGHT
 - 0" - 120" LIFT RANGE
 - MAXIMUM LOAD 550 lbs.
 - 8 FEET/MINUTE LIFT SPEED
 - SCREW NUT WORM GEAR DRIVE
 - MOTOR: 1/2 H.P. 110V A.C.
 - POWER SUPPLY: 110V/1PH/60HZ C/W 15A FUSED DISCON.
 - NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
 - SAFETY HANDRAIL ON CARRIAGE
 - ZERO-LOAD START IN BOTTOM POSITION
 - SOLID PLATFORM

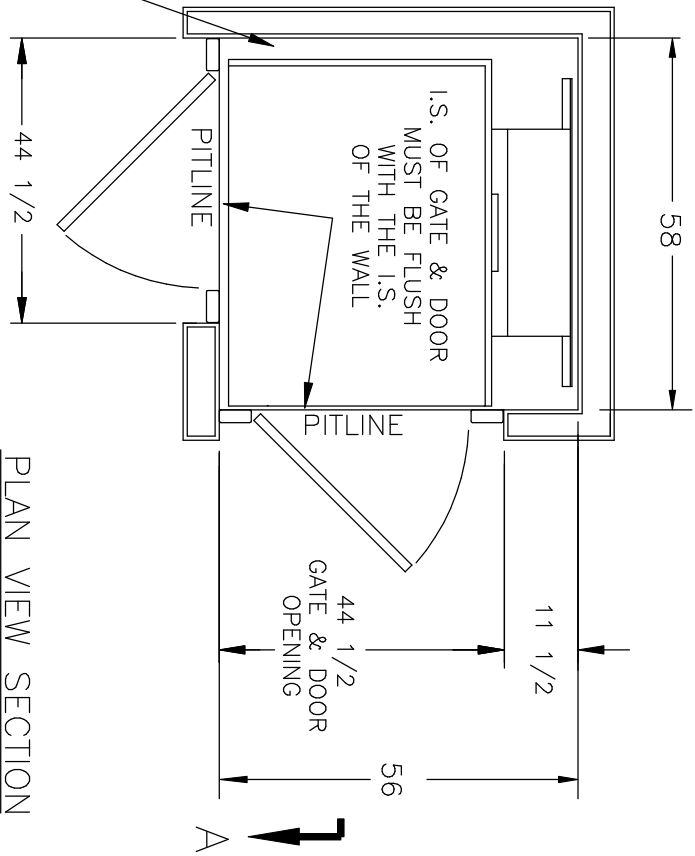

PLAN VIEW SECTION


TRUS-T-LIFT DIMENSIONS

TOTAL TRAVEL	120	INCHES	No. OF LANDINGS	2
LOCATION	ENCLOSED TRUS-T-LIFT ADJACENT ACCESS SAMPLE DRAWING			

ARCHITECT	
GENERAL CONTRACTOR	

		DWN. BY:	
		CHECKED BY:	
TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS		SCALE:	N.T.S.
		DATE:	27/02/04
		DRAWING No.	120UCREGDNAP 1/2
		REV	

- NOTES:
 - Dimensions are in inches
 - Designed and built to meet ASME-A17.1 Safety Code

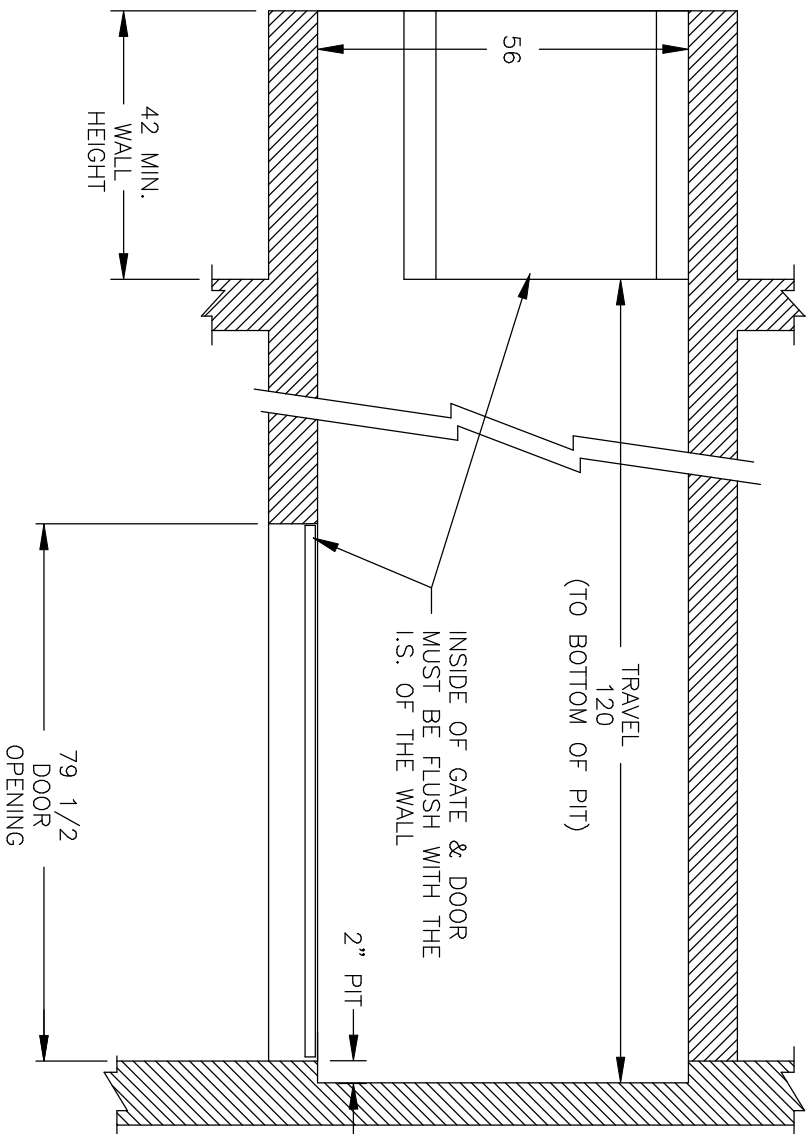

SECTION A-A

TOTAL TRAVEL	120	INCHES	No. OF LANDINGS	2	
LOCATION	ENCLOSED TRUS-T LIFT ADJACENT ACCESS SAMPLE DRAWING				
ARCHITECT					
GENERAL CONTRACTOR					
			TRUS-T LIFT		
DWN. BY:			TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS		
B.H.:					
CHECKED BY:			DATE:		
SCALE:			DRAWING No.		
N.T.S.			120UCREGDNAP 2/2		
			REV		