



- Accepted as Shown
- Revise and Resubmit
- Accepted as Modified
- Date: _____
- Per: _____

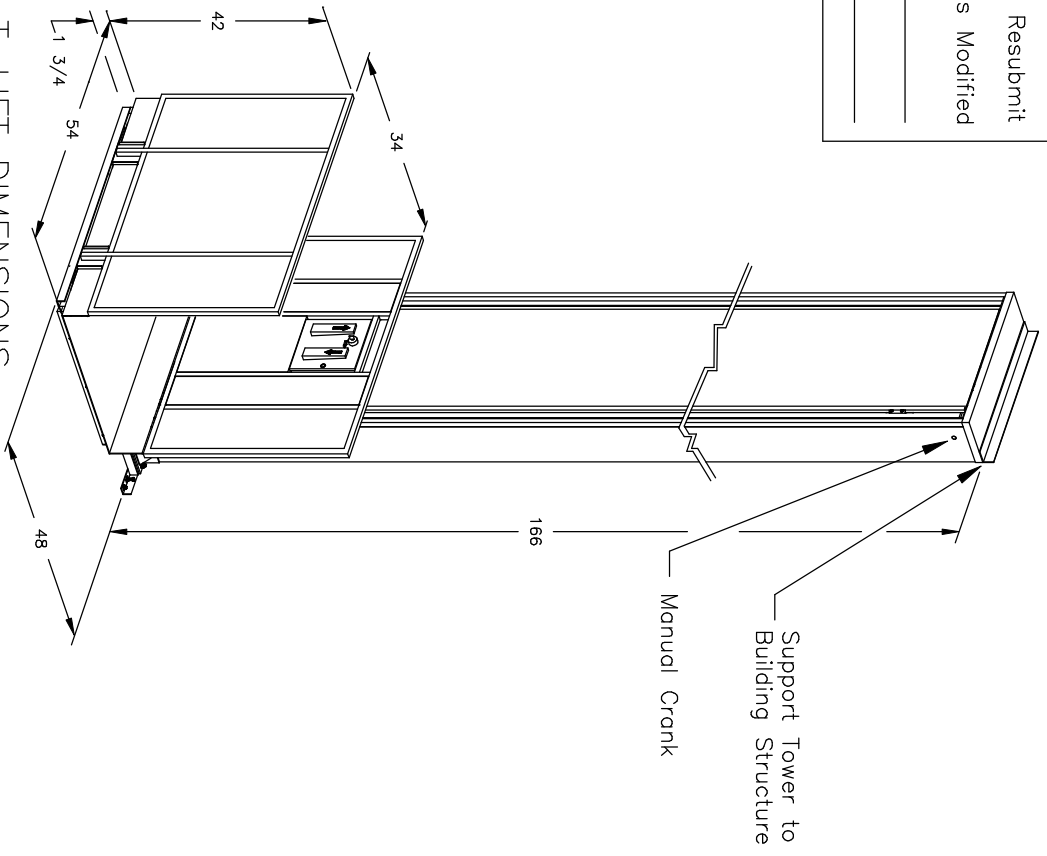


TRUS-T-LIFT DIMENSIONS


- SPECIFICATIONS:**
- 34" x 54" LIFT PLATFORM
 - 48" x 54" FOOTPRINT
 - 166" HEIGHT
 - 0" - 144" LIFT RANGE
 - MAXIMUM LOAD 550 lbs.
 - 8 FEET/MINUTE LIFT SPEED
 - SCREW NUT WORM GEAR DRIVE
 - MOTOR: 1/2 H.P. 110V A.C.
 - POWER SUPPLY: 110V/1PH/60HZ C/W 15A FUSED DISCON.
 - NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
 - SAFETY HANDRAIL ON CARRIAGE
 - ZERO-LOAD START IN BOTTOM POSITION

NOTES:
 - Dimensions are in inches
 - Designed and built to meet ASME-A17.1 Safety Code

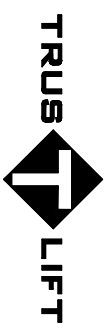TOTAL TRAVEL	144	INCHES	No. OF LANDINGS	2
LOCATION	ENCLOSED TRUS-T-LIFT DRAWING S A M P L E			
ARCHITECT				
GENERAL CONTRACTOR	n/a	n/a	n/a	n/a
				
TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS				
DWN. BY:	R.A.MEUNIER			
CHECKED BY:				
SCALE:	N.T.S.	DATE:	26/02/02	DRAWING No. 144UCREDDGNP
				1/2

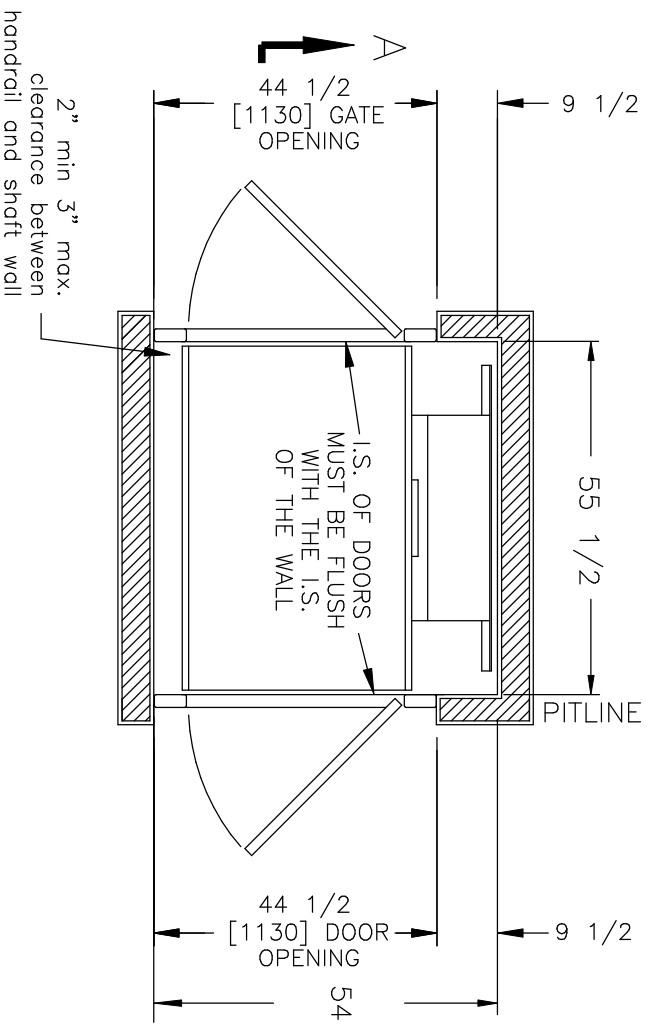

PLAN VIEW SECTION

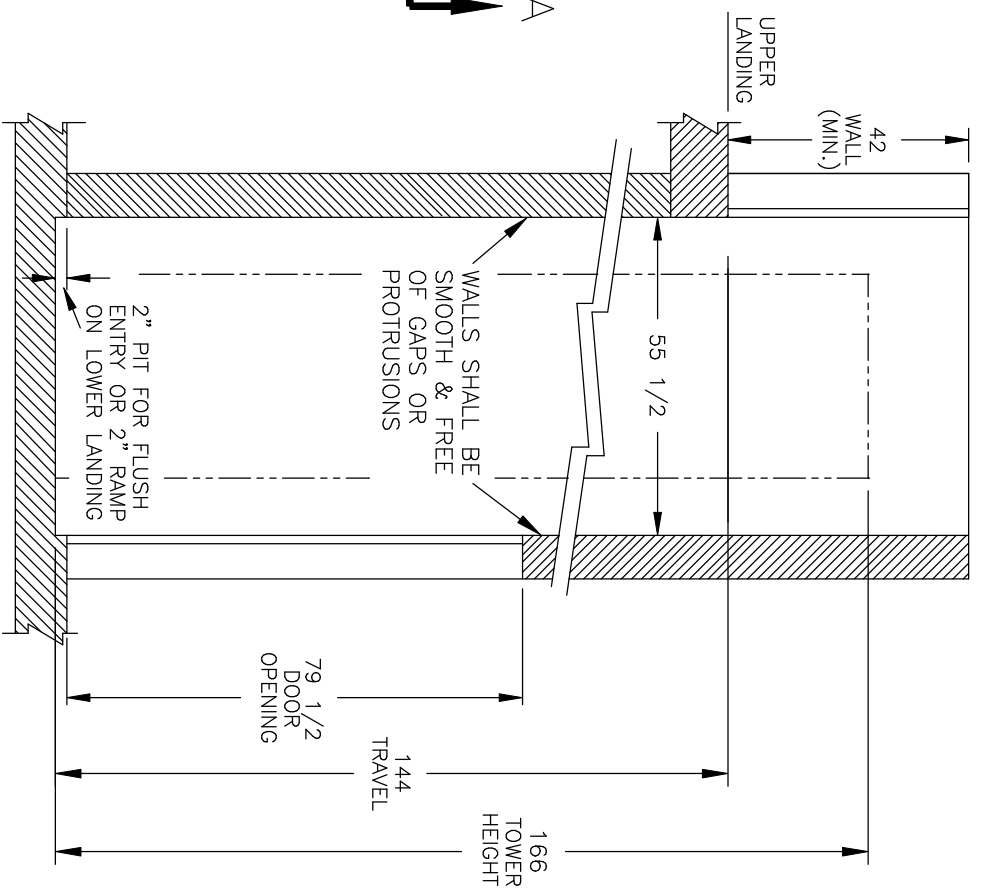

SECTION A-A

TOTAL TRAVEL	144	INCHES	No. OF LANDINGS	2
--------------	-----	--------	-----------------	---


LOCATION ENCLOSED TRUS-T>LIFT
S A M P L E D R A W I N G

ARCHITECT

GENERAL CONTRACTOR
n/a
n/a
n/a

DWN. BY:
R.A.MEUNIER

CHECKED BY:



TRUS-T-LIFT ELEVATOR
INSTALLATION DETAILS

SCALE:

N.T.S.

DATE:

26/02/02

DRAWING No.

144UCREDDGNP

2/2