


Accepted as Shown
 Revise and Resubmit
 Accepted as Modified
 Date: _____
 Per: _____

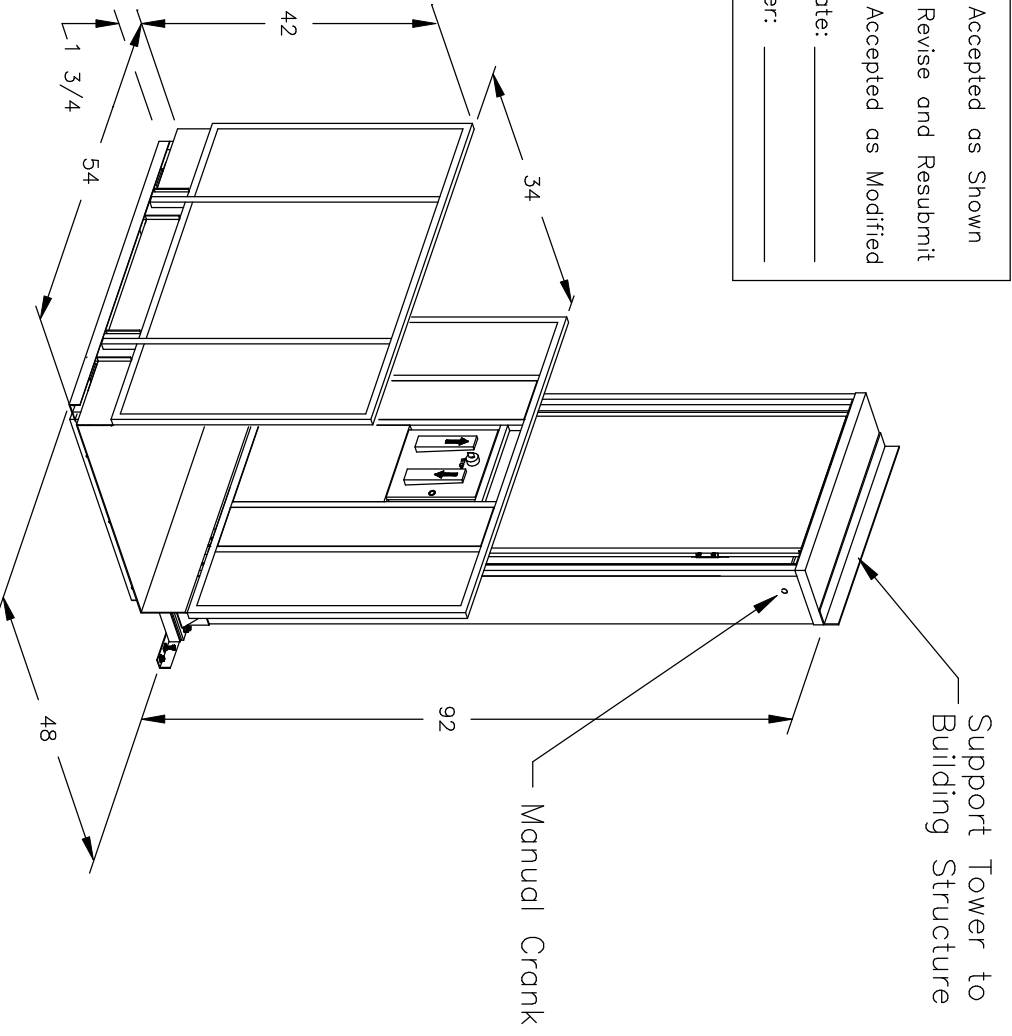


TRUS-T-LIFT DIMENSIONS

TOTAL TRAVEL	72	INCHES	No. OF LANDINGS	2
LOCATION	ENCLOSED TRUS-T-LIFT S A M P L E D R A W I N G			
ARCHITECT				
GENERAL CONTRACTOR				


- SPECIFICATIONS:**
- 34" x 54" LIFT PLATFORM
 - 48" x 54" FOOTPRINT
 - 92" HEIGHT
 - 0" - 72" LIFT RANGE
 - MAXIMUM LOAD 550 lbs.
 - 8 FEET/MINUTE LIFT SPEED
 - SCREW NUT WORM GEAR DRIVE
 - MOTOR: 1/2 H.P. 110V A.C.
 - POWER SUPPLY: 110V/1PH/60HZ C/W 15A FUSED DISCON.
 - NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
 - SAFETY HANDRAIL ON CARRIAGE
 - ZERO-LOAD START IN BOTTOM POSITION

NOTES:
 - Dimensions are in inches
 - Designed and built to meet ASME-A17.1 Safety Code

		TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS	
DWN. BY:	B. HANNAH	DATE:	14/06/04
CHECKED BY:		DRAWING No.	72UCREDDGNP
SCALE:	N.T.S.		1/2

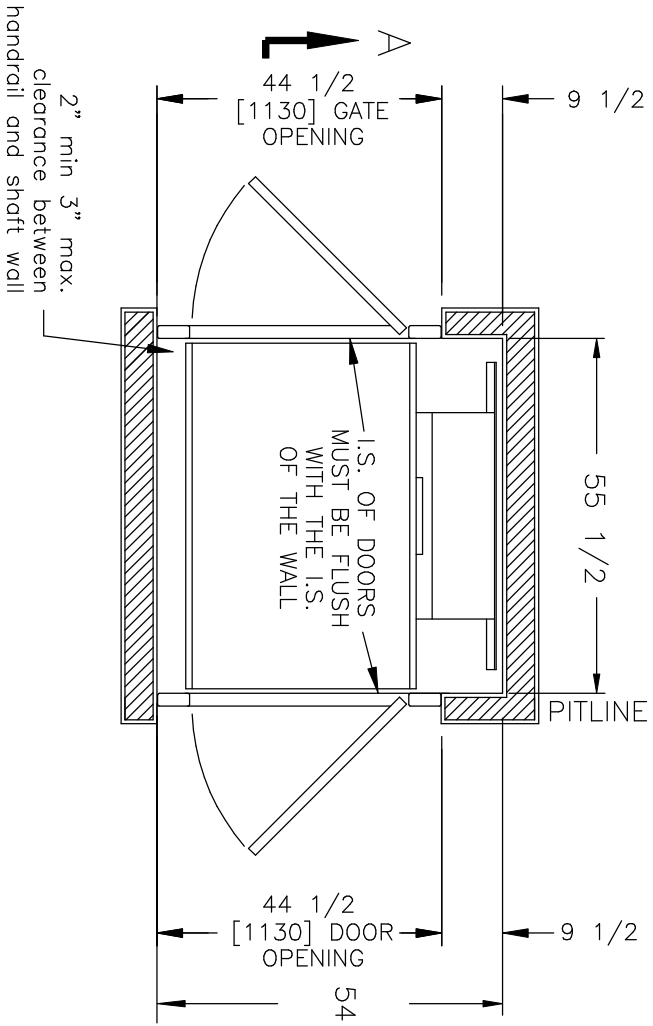


PLAN VIEW SECTION

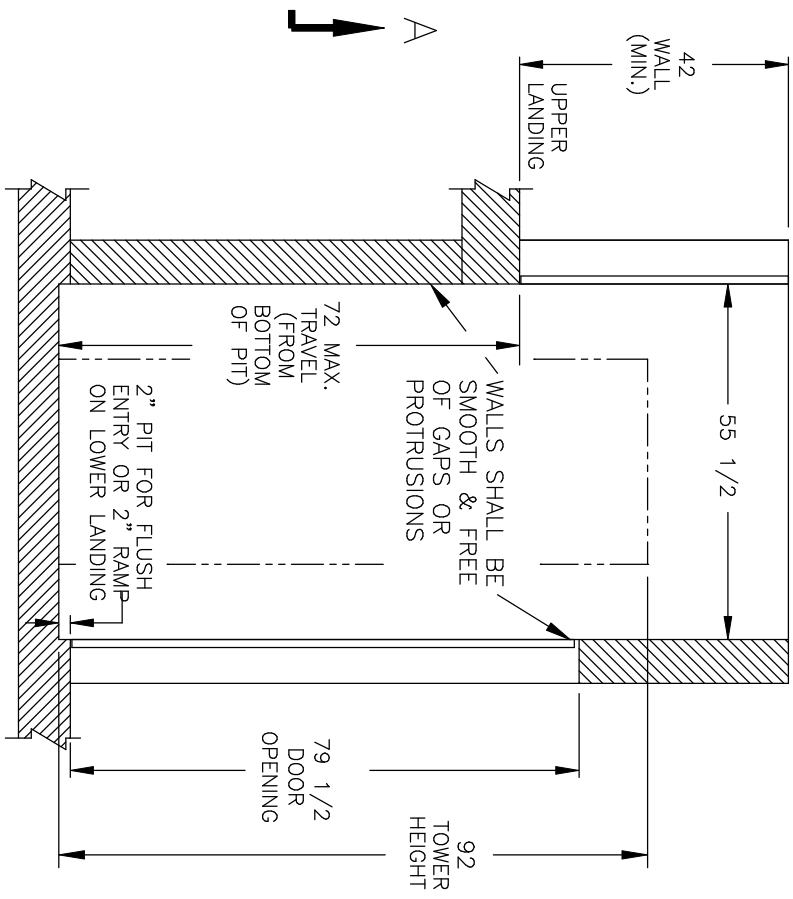

SECTION A-A

TOTAL TRAVEL	72	INCHES	No. OF LANDINGS	2
LOCATION	ENCLOSED TRUS<T>LIFT S A M P L E D R A W I N G			
ARCHITECT				
GENERAL CONTRACTOR				

DWN. BY:	B. HANNAH		TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS
CHECKED BY:			
SCALE:	N.T.S.	DATE:	14/06/04
DRAWING No.	72UCREDGNP		2/2