


Accepted as Shown  
 Revise and Resubmit  
 Accepted as Modified  
 Date: \_\_\_\_\_  
 Per: \_\_\_\_\_

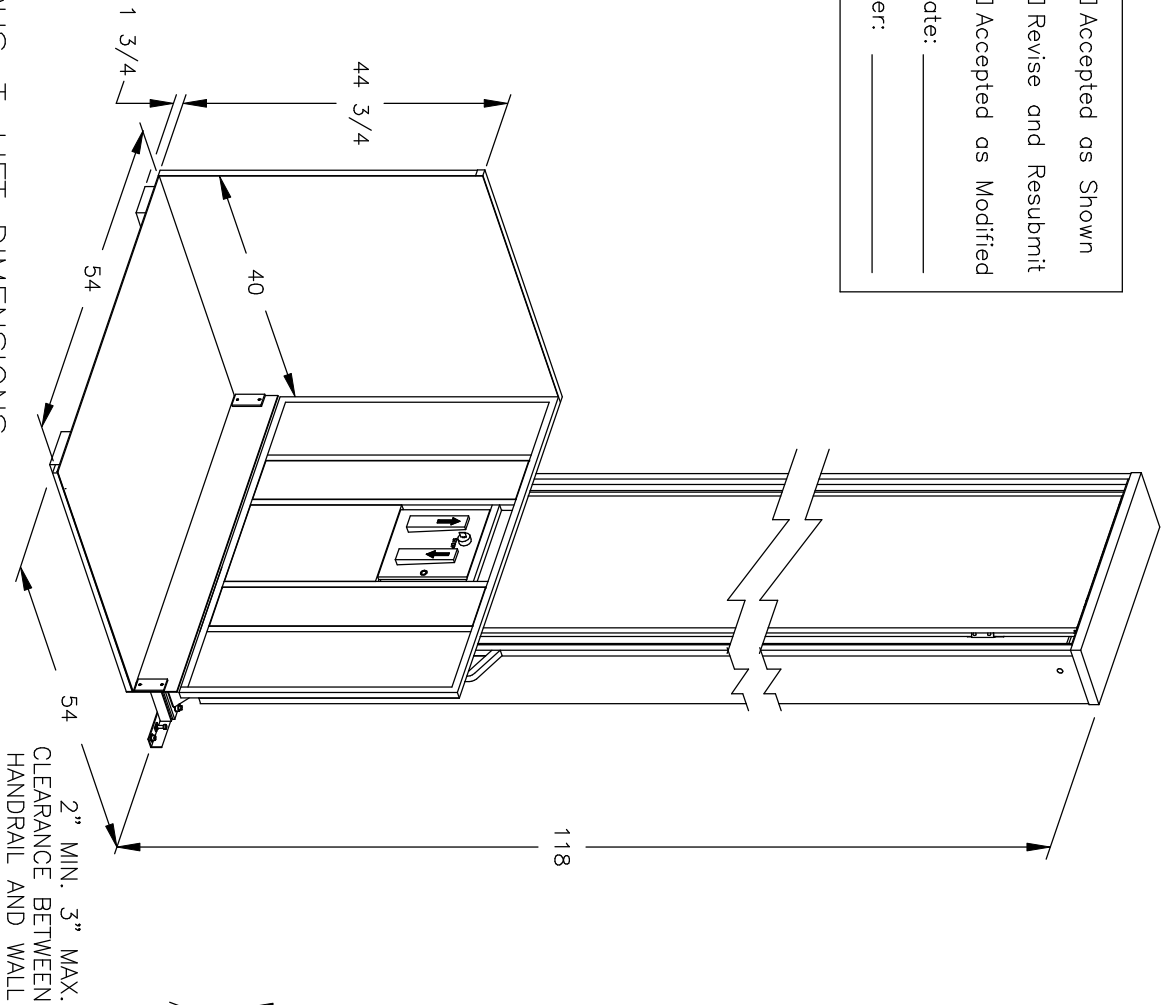

**TRUS-T-LIFT DIMENSIONS**

TOTAL TRAVEL	96	INCHES	No. OF LANDINGS	2
--------------	----	--------	-----------------	---


LOCATION ENCLOSED TRUS<T>LIFT  
 ADJACENT ACCESS SAMPLE DRAWING

ARCHITECT

GENERAL CONTRACTOR

**SPECIFICATIONS:**

- 40" x 54" LIFT PLATFORM
- 54" x 54" FOOTPRINT
- 118" TOWER HEIGHT
- 0" - 96" LIFT RANGE
- MAXIMUM LOAD 550 lbs.
- 8 FEET/MINUTE LIFT SPEED
- SCREW NUT WORM GEAR DRIVE
- MOTOR: 1/2 H.P. 110V A.C.
- POWER SUPPLY: 110V/1PH/60HZ C/W 15A FUSED DISCON.
- NON-LOAD BEARING BACKUP SAFETY NUT ON LIFT SHAFT
- SAFETY HANDRAIL ON CARRIAGE
- ZERO-LOAD START IN BOTTOM POSITION
- SOLID PLATFORM

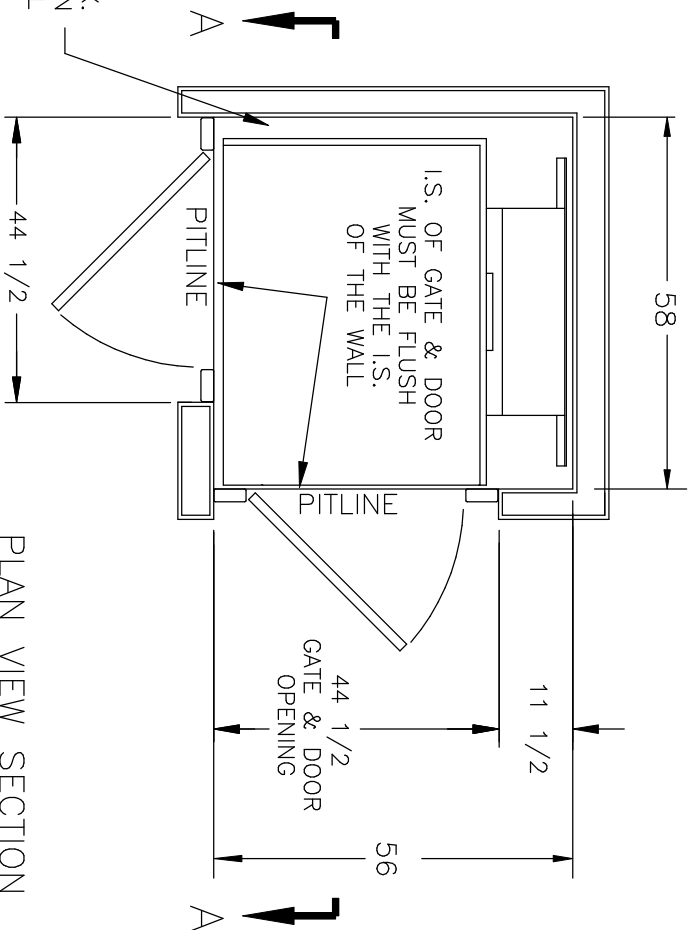

**PLAN VIEW SECTION**




TRUS-T-LIFT ELEVATOR  
INSTALLATION DETAILS

DWN. BY: \_\_\_\_\_  
 B.H. \_\_\_\_\_  
 CHECKED BY: \_\_\_\_\_  
 SCALE: N.T.S.


DATE: 27/02/04  
 DRAWING No. 120UCREGDNP 1/2  
 REV \_\_\_\_\_

- NOTES:  
 - Dimensions are in inches  
 - Designed and built to meet ASME-A18.1 Safety Code

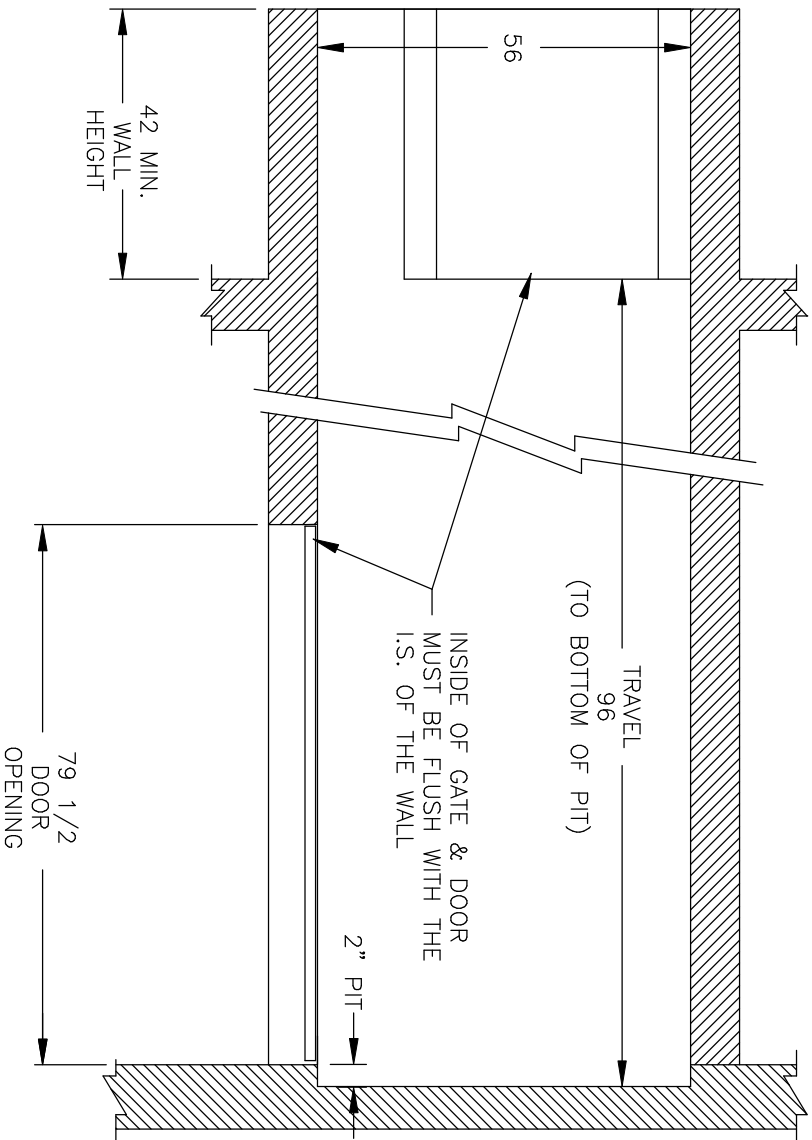

SECTION A-A

TOTAL TRAVEL	96	INCHES	No. OF LANDINGS	2
LOCATION	ENCLOSED TRUS-LIFT ADJACENT ACCESS SAMPLE DRAWING			
ARCHITECT				
GENERAL CONTRACTOR				

DWN. BY:			TRUS-T-LIFT ELEVATOR INSTALLATION DETAILS
B.H.			
CHECKED BY:			
SCALE:	N.T.S.	DATE:	27/02/04
		DRAWING No.	120UCREGDNAP 2/2
		REV	